



Series: **Recessed Aluminum LED Edgelit Exit (RELZXTE)** Fixture Type : **Damp Location Exit Sign**

Project Name	Fixture Type	Catalog #	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>




Design Features / Specifications

- ILLUMINATION**
- Ultra-bright, energy efficient, long-life Red or Green LED.
 - UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
 - Double face utilizes factory install LED silver or white mylar background panel.
- ELECTRICAL**
- Dual 120/277 voltage.
 - Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
 - 4.8V long-life, maintenance-free, rechargeable NiCd battery.
 - Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
 - Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- MOUNTING**
- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- HOUSING**
- Premium-grade, extruded aluminum housing.
 - Extruded Aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance, also available in black or white powder-coated finishes.
 - Self-adhesive Chevron appliques and guide template provided for directional indication.
- OPTIONS**
- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
 - 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
 - Custom: Signs available with requested 'special' wording.
 - USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- WARRANTY / LISTING**
- Five year warranty on all electronics and housing. Battery pro rated for five years.
 - Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
 - UL Listed for wet locations (0°C – 50°C).

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.

Recessed Aluminum LED Edgelit Exit	
Catalog #	Description
Complete Units	
Ordering Information	
Example: RELZXTE-1-R-C-W-EM-USA	
RELZXTE	Model: RELZXTE = Recessed Aluminum LED Edgelit Exit
	# of Faces: 1 = Single Face 2 = Double Face
	Letter Color: R = Red G = Green
	Panel: C = Clear (with single face only) M = Mirror W = White
	Trim Plate: W = White B = Black A = Aluminum (Brushed)
	Battery: (Blank) = AC-Only EM = Battery Back-up
	Arrow(s): AL = Arrow Left AR = Arrow Right ALAR = Arrow Left, Arrow Right
	Options: Custom = Custom Wording USA = Assembled in USA SDT = Self-diagnostics 2C = Dual Circuit

Dimensional Information

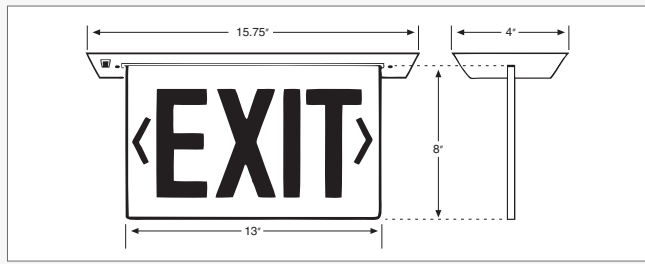

Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120v	277v	120v	277v
RELZXTE-RED/GREEN/EM/2C/SDT	3.8	4.5	0.030	0.020