



Innovative Lighting Ideas
Energy Efficient Solutions



OVATION
by RENOVA Lighting

INSTALLATION GUIDE FOR: **O**VATION SERIES SURFACE MOUNT

Model Numbers

1x4 - SVN14 • 2x2 - SVN22 • 2x4 - SVN24

SAFETY PRECAUTIONS

READ ALL SAFETY PRECAUTIONS AND INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING OR SERVICING THIS FIXTURE. FAILURE TO COMPLY WITH THESE INSTRUCTIONS COULD RESULT IN POTENTIALLY FATAL ELECTRIC SHOCK AND/OR PROPERTY DAMAGE.

IT IS RECOMMENDED THAT A QUALIFIED ELECTRICIAN PERFORM ALL WIRING AND INSTALLATION IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.

DO NOT HANDLE ANY ENERGIZED FIXTURE OR ATTEMPT TO ENERGIZE ANY FIXTURE WITH WET HANDS OR WHILE STANDING ON A WET OR DAMP SURFACE OR IN WATER.

TO REDUCE THE RISK OF ELECTRICAL SHOCK AND TO ASSURE PROPER OPERATION, THIS FIXTURE MUST BE ADEQUATELY GROUNDED. TO ACCOMPLISH PROPER GROUNDING, THERE MUST BE A SEPARATE GROUNDING WIRE (GREEN) OR BARE METAL CONTACT (METAL CONDUIT) BETWEEN THIS FIXTURE AND THE GROUND CONNECTION OF YOUR MAIN POWER SUPPLY PANEL. THE GREEN GROUND WIRE IS CLEARLY IDENTIFIED IN THE FIXTURE HOUSING.


HANDLE FIXTURE CAREFULLY TO AVOID ANY POSSIBLE SHARP EDGE INJURY.

DISCONNECT OR TURN OFF ELECTRICAL POWER AT THE FUSE OR CIRCUIT PANEL BEFORE INSTALLING OR SERVICING THIS FIXTURE.

WARNING

TURN OFF ALL POWER BEFORE INSTALLING OR PERFORMING MAINTENANCE TO REDUCE THE RISK OF ELECTRICAL SHOCK.

2×4 FIXTURE SHOWN

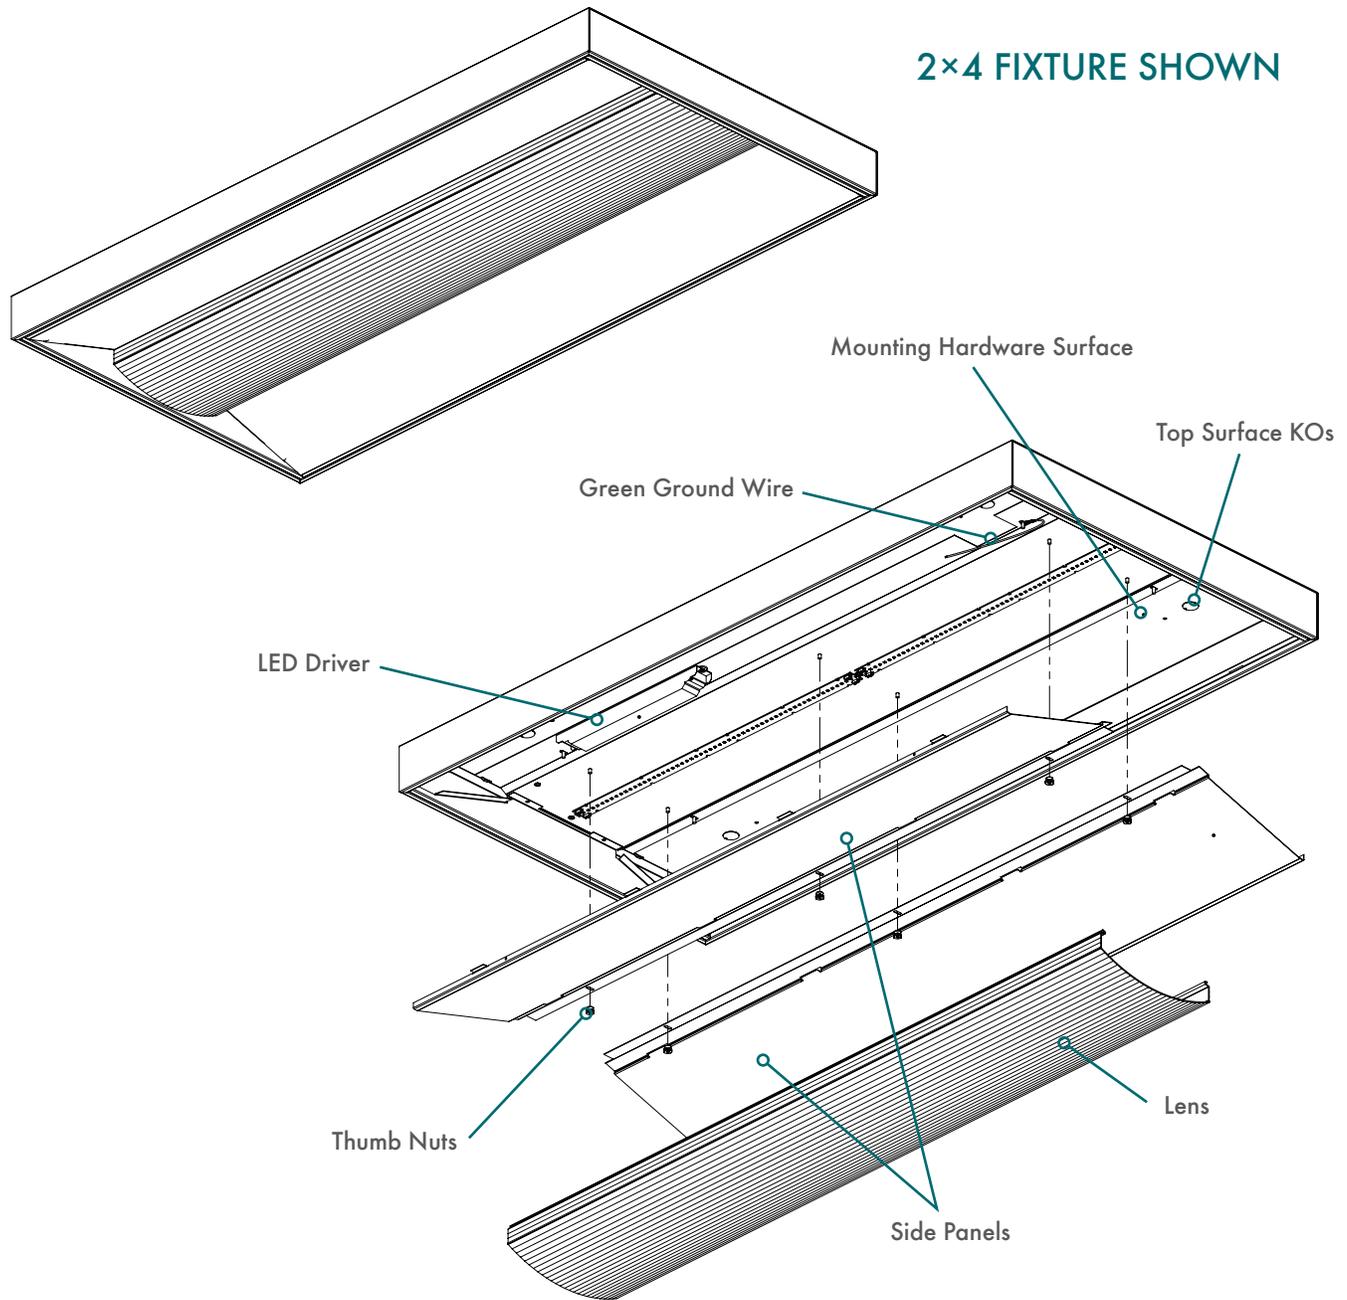

1. REMOVE BOTH SIDE PANELS BY REMOVING THE LENS AND THUMB NUTS.
2. REMOVE THE NECESSARY NUMBER OF KNOCK OUTS OR DRILL A HOLE ON THE TOP SURFACE OF THE FIXTURE FOR THE POWER FEED. THE HOLE SHOULD BE ON THE SAME SIDE OF THE FIXTURE AS THE DRIVER AND SHOULD LEAVE SPACE FOR A REQUIRED STRAIN RELIEF FITTING (SUPPLIED BY OTHERS) WHEN THE SIDE PANELS ARE RE-INSTALLED.
3. USING APPROPRIATE FASTENERS (SUPPLIED BY OTHERS) FASTEN THE FIXTURE TO THE CEILING AND COMPLETE PRIMARY LEAD WIRING AND GROUNDING AS REQUIRED.
4. RE-INSTALL BOTH SIDE PANELS USING THUMB NUTS AND RE-INSTALL THE LENS.
5. TURN POWER SUPPLY ON AND CONFIRM PROPER OPERATION.
6. THESE INSTRUCTIONS SHOULD BE LEFT WITH AND RETAINED BY BUILDING OWNER.