



Series: **Razor LED Exit Sign (RZR)** Fixture Type: **Die-Cast Aluminum (Ultra-Thin Profile) Exit Sign**

Project Name	Fixture Type	Catalog #	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>



Design Features / Specifications

ILLUMINATION

Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

Dual 120/277 voltage.

Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

2.4V long life, maintenance-free, rechargeable NiCd battery.

Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

Aluminum mounting canopy included for top or end mount.

Universal K/O pattern on back plate for wall mount.

HOUSING

Premium-grade, aluminum housing (also available in black or white powder-coated finishes).

Field selectable knockout chevron directional indicators.

Quick-snap face plate closure.

Specification-grade, low profile thin aluminum die-cast design.

Available specifically in single or double face only.

WARRANTY / LISTING

Five year warranty on all electronics and housing. Battery pro rated for five years.

Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA,

Local and State Codes.

UL Listed for damp locations (0°C – 50°C).

Razor LED Exit Sign (Ultra-Thin/Die-Cast Aluminum)

Catalog # Description


Complete Units

Ordering Information

Example: RZR-1-R-A-EM

<input type="text" value="RZR"/>	Model:	RZR = Razor LED Exit Sign (Ultra-Thin/Die-Cast Aluminum)
<input type="text"/>	# of Faces:	1 = Single Face 2 = Double Face
<input type="text"/>	Letter Color:	R = Red G = Green
<input type="text"/>	Housing Color:	W = White B = Black A = Aluminum
<input type="text"/>	Battery:	(Blank) = AC-Only EM = Battery Back-up

Dimensional Information

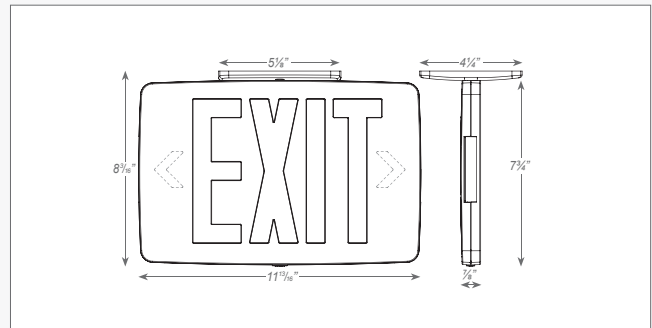

Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120v	277v	120v	277v
RZR-1-R-A-EM	1.0	1.0	0.10	0.10

Note: RENOVA products are constantly being improved; therefore, the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.