

ProLine

by RENOVA Lighting


Category: LED

ProLine Series

The ProLine Series Linear LED is a linear recessed fixture bringing superior optical capabilities to a 2" form factor with an integral driver. The ProLine2 Recessed is designed to be specification grade with a wide range of beam options, high CRI, and color options. The ProLine2 also comes with a range of accessories, mounting options, and finishes that provide an easy route to customization and performance enhancements. The ProLine series provides an attractive, energy efficient architectural look which provides a comfortable, low glare, uniform lighting. Typical applications for this type of product are interior spaces where finished ceilings and walls exist. Applications Include:

- Commercial/Corporate Office Spaces
- Retail Spaces, Public Spaces and Airports
- Schools, Colleges and Universities
- Hospitals, Government Facilities and Military Bases

Prefix: PL2

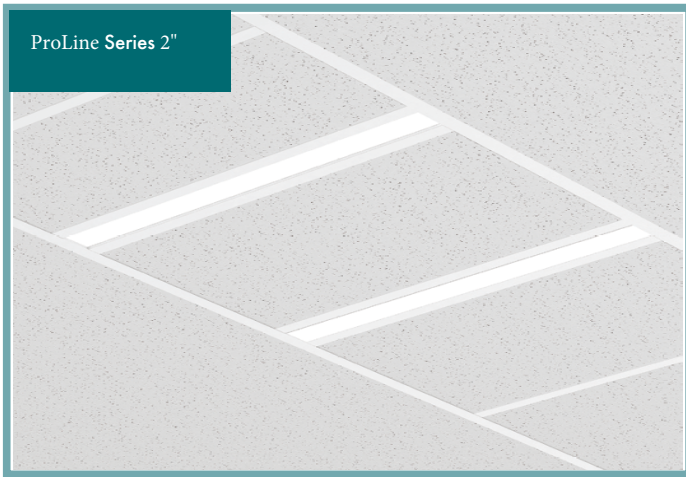

project:

fixture type:

catalog #:

quantity:


ORDERING GUIDE

PREFIX/SERIES	FLANGE TYPE	SIZE	FINISH	OPTIC	CRI	COLOR TEMP.	BEAM DIST.	LUMEN OUTPUT	DRIVER VOLTAGE	DRIVER	EM BACKUP
PL2-R ProLine Series 2" Recessed	F1 - 9/16" Flat T-Bar F2 - 9/16" Bolt Slot T-Bar F3 - 15/16" Flat T-Bar MK - Muchh Kit	2 - 2ft 4 - 4ft 6 - 6ft 8 - 8ft 10 - 10ft	MWH - Matte White MBK - Matte Black MGR - Matte Gray CAE - Clear Anodized Effect	OFL - Flush Lens ORL - Regressed Lens	S80 - Std. 80 CRI S90 - Std. 90 CRI SUN - Full Sun Like	C27 - 2700 K C30 - 3000 K C35 - 3500 K C40 - 4000 K C50 - 5000 K	DLAM - Lambertian DBW60 - Batwing 60° DDA70 - Double Asymmetric 70° DA5025 - Asymmetric 50° at 25° Tilt DA4005 - Asymmetric 40° at 5° Tilt DM55 - Medium 55° DN40 - Narrow 40°	L035 - 350 lm/ft L050 - 500 lm/ft L075 - 750 lm/ft L100 - 1,000 lm/ft L125 - 1,250 lm/ft L150 - 1,500 lm/ft LX - Specify lm/ft	UNV - Universal Voltage (120v - 277v)	FDND - Factory Non-Dimming FD01 - Factory 0-10V 1% Dim FD10 - Factory 0-10V 10% Dim FD05 - Factory 0-10V 5% Dim FD02 - Factory 0-10V 2% Dim FD01 - Factory 0-10V 1% Dim FD00 - Factory 0-10V 0% Dim FD01 - Factory 0-10V 1% Dim FD02 - Factory 0-10V 2% Dim FD05 - Factory 0-10V 5% Dim FD10 - Factory 0-10V 10% Dim FD20 - Factory 0-10V 20% Dim FD50 - Factory 0-10V 50% Dim FD100 - Factory 0-10V 100% Dim FD01 - Factory 0-10V 1% Dim FD02 - Factory 0-10V 2% Dim FD05 - Factory 0-10V 5% Dim FD10 - Factory 0-10V 10% Dim FD20 - Factory 0-10V 20% Dim FD50 - Factory 0-10V 50% Dim FD100 - Factory 0-10V 100% Dim	NN - Not Needed EMC - Emergency Circuit EMB - Emergency Battery (10 W — Onboard)



PL2 Dimensions

Prefix: PL2

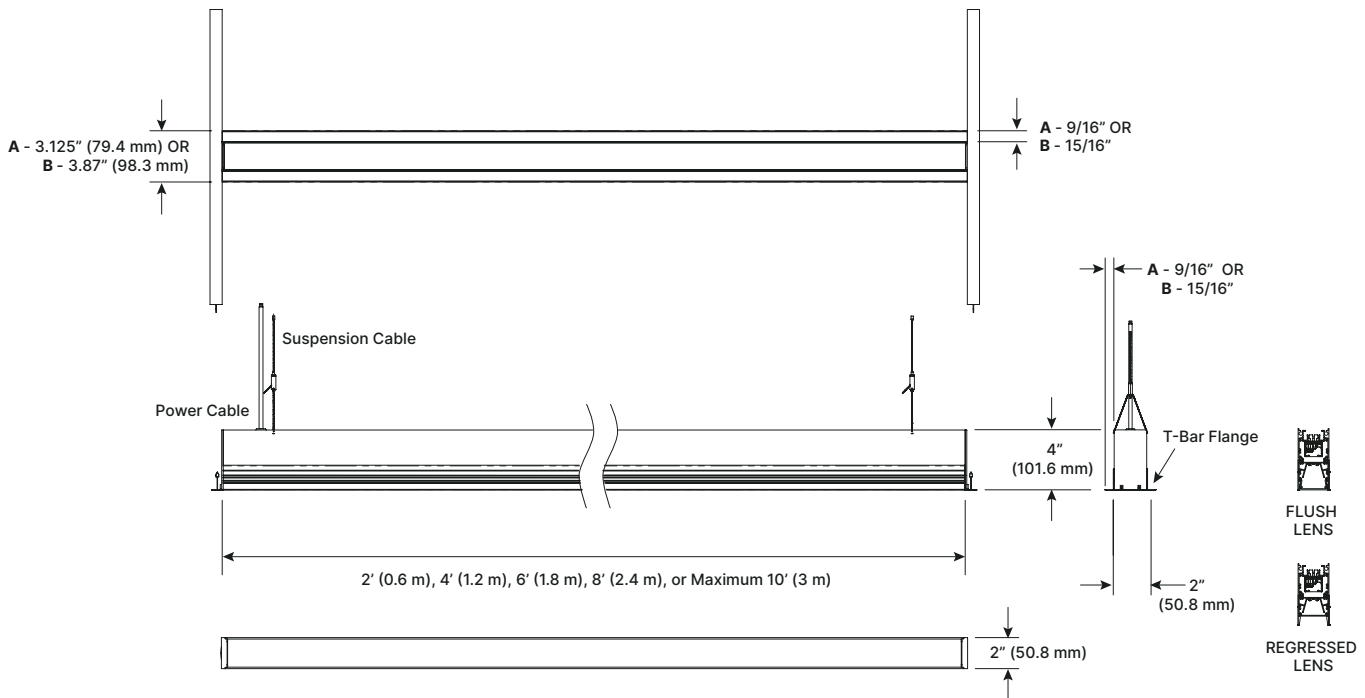

Length

Length Options 2', 4', 6', 8', 10' nominal, or custom within 3"

Finish

Housing Colors (Matte Finish)



Matte White



Matte Black



Matte Gray



Clear Anodized Effect

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

Optic

Lens Options Flush, Regressed, and Continuous Regressed

Lens Material Patented SmartOptics® made from Acrylic (PMMA)

Voltage

Fixture Voltage (AC) 120–277 VAC, 50/60 Hz

NOTES:

LED Drivers have adjustable output capability. A wide range of input watts/lumen output can be adjusted up or down on all models to suit a particular application. Always consult factory for the latest information.


Photometric data, IES files and all other information is available on request.

RENOVA products are constantly being improved; therefore the information shown is subject to change without notice. Always consult your lighting representative or RENOVA Lighting Systems, Inc. for the latest information.


LED SELECTION GUIDE

Prefix: PL2


S80: Standard 80+ CRI



S90: Standard 90+ CRI



SUN: Full Spectrum "SunLike"



Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130

LPW Efficacy Conversion Chart


CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
SUN	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05

OPTIC	BEAM PATTERN						
	DLAM	DBW60	DDA70	DA5025	DA4005	DM55	DN40
Flush Lens	●	●	●	●	●	●	●
Regressed Lens	●	●	●	●	●	●	●

DIRECT PHOTOMETRICS


Static White Light

DLAM: Lambertian




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.28
LPW 142

DBW60: Batwing 60°




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.17
LPW 145

DDA70: Double Asymmetric 70°




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.43
LPW 138

DA5025: Asymmetric 50° at 25° Tilt




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 21
W/ft 5.24
LPW 143

DA4005: Asymmetric 40° at 5° Tilt




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.39
LPW 139

DM55: Medium55°




Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.47
LPW 137


DN40: Narrow 40°



Length 48"
LED HE90
CRI/CCT 90+/3500K
Lumens 3,000
lm/ft 750
Watts 22
W/ft 5.51
LPW 136

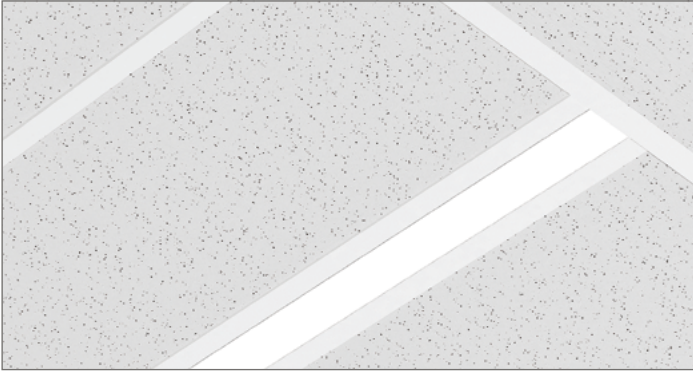

Flush Lens

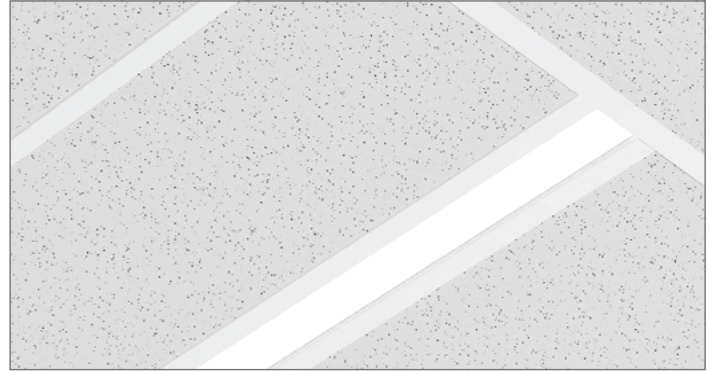

Regressed Lens

FIXTURE MOUNTING

Mounting Type

Recessed Mount

Installs into a surface. Available with a range of accessories, mounts and inserts that provide easy customization of visual appearance and performance enhancements.


Cable Kit

Suspension Cable


Stainless Steel

Mounting Options


F1 - 9/16" Flat T-Bar Mount

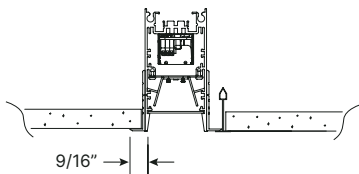

F2 - 9/16" Bolt Slot T-Bar Mount

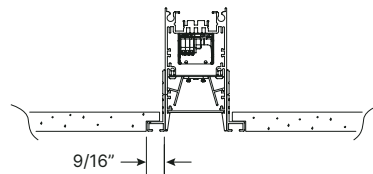

F3 - 15/16" Flat T-Bar Mount

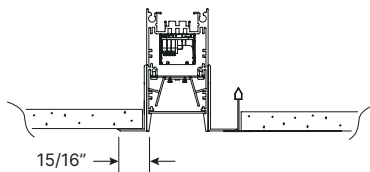

MK - Mud-In Kit

